


-

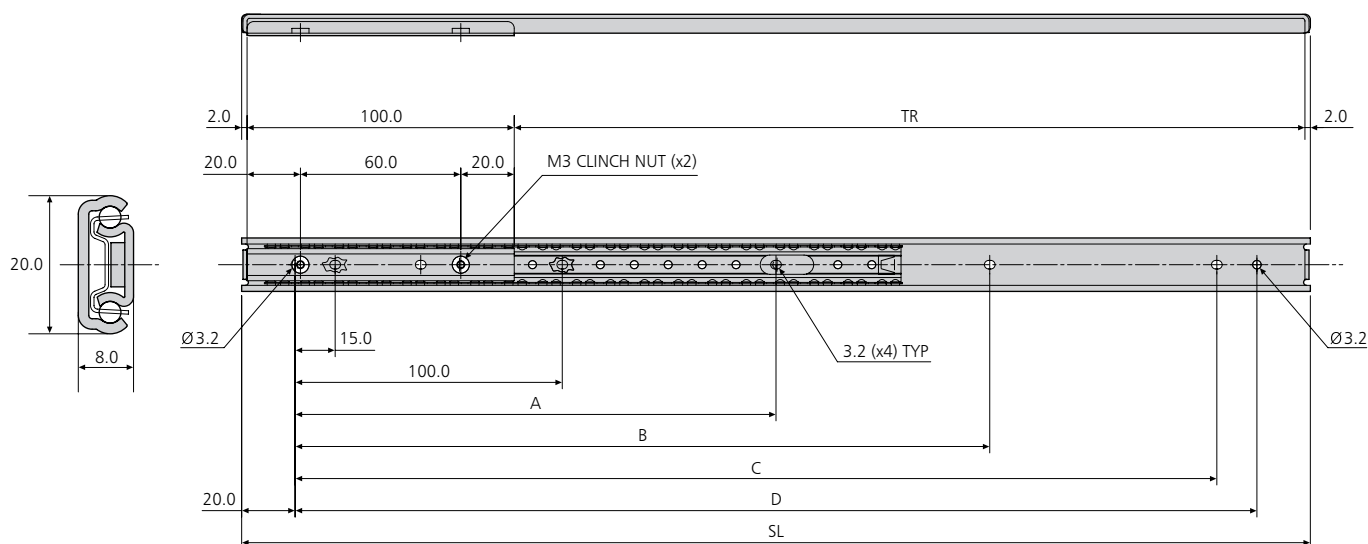

2415	mm						kg	
	SL	TR±3	A	B	C	D	W	L
DZ2415-0020	200	96	-	-	145.0	160.0	0.21	18.5
DZ2415-0025	250	146	-	-	195.0	210.0	0.26	18.5
DZ2415-0030	300	196	-	160.0	245.0	260.0	0.30	18.5
DZ2415-0035	350	246	-	210.0	295.0	310.0	0.34	18.5
DZ2415-0040	400	296	-	260.0	345.0	360.0	0.38	18.5
DZ2415-0045	450	346	205.0	310.0	395.0	410.0	0.42	18.5
DZ2415-0050	500	396	230.0	360.0	445.0	460.0	0.46	18.5
DZ2415-0055	550	446	255.0	410.0	495.0	510.0	0.50	18.5

- *Empfohlene Befestigung: Schraube M3*
- *Bitte beachten Sie die 2D-CAD-Zeichnung wegen Abmessungstoleranzen*

Accuride reserve the right to alter specifications without notice / Accuride se réserve le droit de modifier les spécifications sans préavis / Technische Änderungen vorbehalten