# 3301-60

- Load rating up to 60kg
- 100%+ extension
- 14.3mm slide thickness
- Brackets on drawer member
- Hold-in
- Not suitable for flat mounting
- Temperature -20°C to +70°C
- DZ - 12 hours salt spray test

50,000

- Charge jusqu'à 60kg
- Course +100%
- Épaisseur de glissière de 14,3mm
- Équerres de montage sous tiroir
- Point dur en position fermée
- Ne convient pas pour un montage à plat
- Température d'utilisation de -20 °C à +70 °C
- DZ- 12 heures de tenue au brouillard salin

- Lastwert bis 60kg
- Überauszug
- 14,3mm Schienendicke
- Winkel an Schiene zur Bodenmontage
- Rastung in geschlossener Position
- Nicht für Flachmontage geeignet
- Temperatur -20C bis +70C
- DZ - 12 Stunden Salzsprühtest



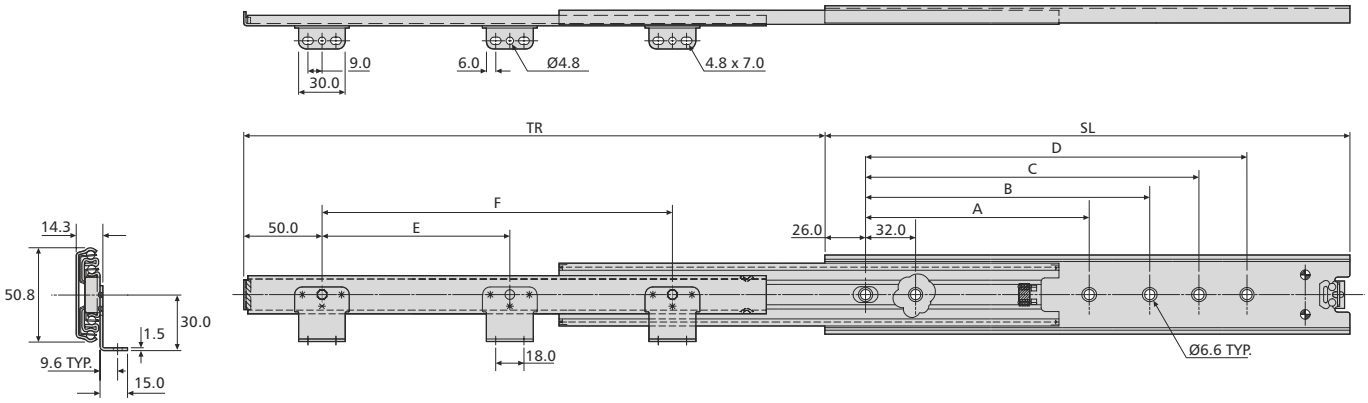


| 3301-60 | mm | | | | | | | | kg | |
|---|---|---|---|---|---|---|---|---|---|---|
| | SL | TR | A | B | C | D | E | F | W | L |
| DZ3301-6030 | 300 | 325.0 | - | - | 224 | - | - | 190 | 1.29 | 60 |
| DZ3301-6035 | 350 | 374.2 | - | - | 224 | 256 | - | 240 | 1.48 | 59 |
| DZ3301-6040 | 400 | 436.1 | 160 | 192 | 320 | - | - | 290 | 1.69 | 59 |
| DZ3301-6045 | 450 | 498.0 | 160 | 192 | 320 | 352 | - | 340 | 1.90 | 58 |
| DZ3301-6050 | 500 | 547.2 | 192 | 224 | 416 | 448 | - | 390 | 2.13 | 58 |
| DZ3301-6055 | 550 | 596.4 | - | 224 | 448 | 480 | 250 | 440 | 2.35 | 57 |
| DZ3301-6060 | 600 | 658.3 | 256 | 288 | 480 | 512 | 250 | 490 | 2.57 | 55 |
| DZ3301-6065 | 650 | 707.5 | 256 | 288 | 544 | 576 | 250 | 540 | 2.83 | 53 |
| DZ3301-6070 | 700 | 769.4 | 288 | 416 | 576 | 608 | 250 | 590 | 3.04 | 50 |

## Notes:

- Fixing recommendation: 4mm wood screw/ 6mm Euro screw
- Load ratings quoted are the maximum for a pair of side mounted slides installed 450mm apart, unless otherwise stated. For more information go to page 197 of the catalogue
- Please refer to 2D CAD drawings for dimensional tolerances

## Notes:

- Visserie recommandée: Vis à bois 4mm/ Eurovis 6mm
- Charge maximum par paire de glissières montées sur chant sur un tiroir de 450mm de largeur, sauf indication contraire. Pour plus d'information, aller à la page 201 du catalogue
- Pour les tolérances dimensionnelles, veuillez vous reporter à nos plans 2D

## Hinweise:

- Empfohlene Befestigung: Holzschraube 4mm/ Euro-Schraube 6mm
- Falls nicht anders angegeben, sind die genannten Tragkräfte die maximal erreichbaren, bei einem Paar seitlich montierten Führungen mit 450mm Schienenabstand. Für mehr Informationen gehen Sie bitte zur Katalogseite 205
- Bitte beachten Sie die 2D-CAD-Zeichnung wegen Abmessungstoleranzen

PNEUTROL INTERNATIONAL LIMITED
sales@pneutrol.com

UK OFFICE:
5 CAULSIDE DRIVE, ANTRIM, BT41 2DU, NORTHERN IRELAND
TEL: + 44 (0) 28 9448 1800, www.pneutrol.com/industrialspares

EUROPEAN OFFICE:
UNIT 6, ST ANTHONY'S BUSINESS PARK DUBLIN, D22 VW95, IRELAND,
TEL: +353 (1) 437 3653, www.pneutrol.com/industrialspares



Accuride reserve the right to alter specifications without notice / Accuride se reserve le droit de modifier les specifications sans preavis / Technische Änderungen vorbehalten