

N° :

DATASHEET

Date : 18 janv. 2021

Universal drive IP20 with options
Unidrive M400-09402240A10100AB100
 keypad ;

Definition

Product range	Unidrive
Model	M400-094-02240A
Model	400 (2 STO - 1 SI option - CodeSys) 6 pulses - internal choke (A)
Onboard Comms	Optionnal comms (1 option slot)
Onboard intelligence	Machine Control Studio (IEC61131-3)
Control Connections	2 STO / 2 AI (0-10V & 4-20mA) + 2 AO (0-10V & 4-20mA) + 5 DI + 2 DIO + 1 RLY
Product cooling version	Air cooling (A)



Electrical characteristics

Network side electrical characteristics

Power supply number of phases	3
Power supply voltage and frequency	380 to 480V (±10%) 45 to 66Hz
Power supply nominal current (A)	267.0

Motion side electrical characteristics

Heavy duty / Open loop control mode

Continuous output current (A)	211.00 @ 3 kHz - 40°C
Output maximal current (A)	336.00
Maximum overload duration from 100% I _{co} (s) / repetitivity (s)	7.00 / 600.00
Maximum overload duration from cold (s) / repetitivity (s)	60.00 / 600.00

Power supply voltage (V ±10%)	Power supply number of phases	Power supply nominal current (A)	Overload	Maximum ambient temperature (°C)	Switching frequency (kHz)	Continuous output current (A)	Losses (W)
400	3	267.0	Heavy duty	40	3	211.0	2400
				50	3	193.0	2184
			Normal duty	40	3	255.0	2998
				50	3	237.0	2760

Power supply voltage (V ±10%)	Power supply number of phases	Surcharge	Mode de fonctionnement	Output maximal current (40°C) (A)	Maximum overload duration from 100% I _{co} (s)	Maximum overload duration from cold (s)
400	3	Heavy duty	Open loop control mode	336.0	7.00	60.00
		Normal duty	Open loop control mode	280.5	9.00	165.00

characteristics

Size	09	Drive flow rate (m3/h)	402
Dimensions (HxWxD)	1049 x 310 x290	acoustic noise (dB(A))	75
Weight (kg)	66.50	Maximal altitude (m)	1000
Protection indice	IP20	Maximal relative humidity (%)	95

PNEUTROL INTERNATIONAL LIMITED
 sales@pneutrol.com

UK OFFICE:
 5 CAULSIDE DRIVE, ANTRIM, BT41 2DU, NORTHERN IRELAND
 TEL: + 44 (0) 28 9448 1800, www.pneutrol.com/industrialspares

EUROPEAN OFFICE:
 UNIT 6, ST ANTHONY'S BUSINESS PARK DUBLIN, D22 VW95, IRELAND,
 TEL: +353 (1) 437 3653, www.pneutrol.com/industrialspares

DATASHEET

N° : _____ Date : 18 janv. 2021

Universal drive IP20 with options - Unidrive M400-09402240A10100AB100

Power options, network side

Line choke	In (A)	Inductance (mH)	Losses (W)	Dimensions (HxWxD)	Weight (kg)
-	0	0	0	0 x 0 x 0	0.0

Power options, motion side

Braking transistor	Braking transistor Included

Integral options

Integrated control interface	Without display and setting
HMI / keypad	CI-KEYPAD LCD
PC communication interface	-
Option slot SM/SI 1	-
Option slot SM/SI 2	-
Option slot SM/SI 3	-
AI Option / Smartcard slot	-
HD15 / terminals feedback device interface	-

Environmental options

IP / UL / through panel kits	-
Product fan management	-

PNEUTROL INTERNATIONAL LIMITED
sales@pneutrol.com

UK OFFICE:
5 CAULSIDE DRIVE, ANTRIM, BT41 2DU, NORTHERN IRELAND
TEL: + 44 (0) 28 9448 1800, www.pneutrol.com/industrialspares

EUROPEAN OFFICE:
UNIT 6, ST ANTHONY'S BUSINESS PARK DUBLIN, D22 VW95, IRELAND,
TEL: +353 (1) 437 3653, www.pneutrol.com/industrialspares


Version V8.305

DATASHEET

N° :

Date : 18 janv. 2021

Variable speed drive (6 pulses) : Unidrive M400-09402240A10100AB100

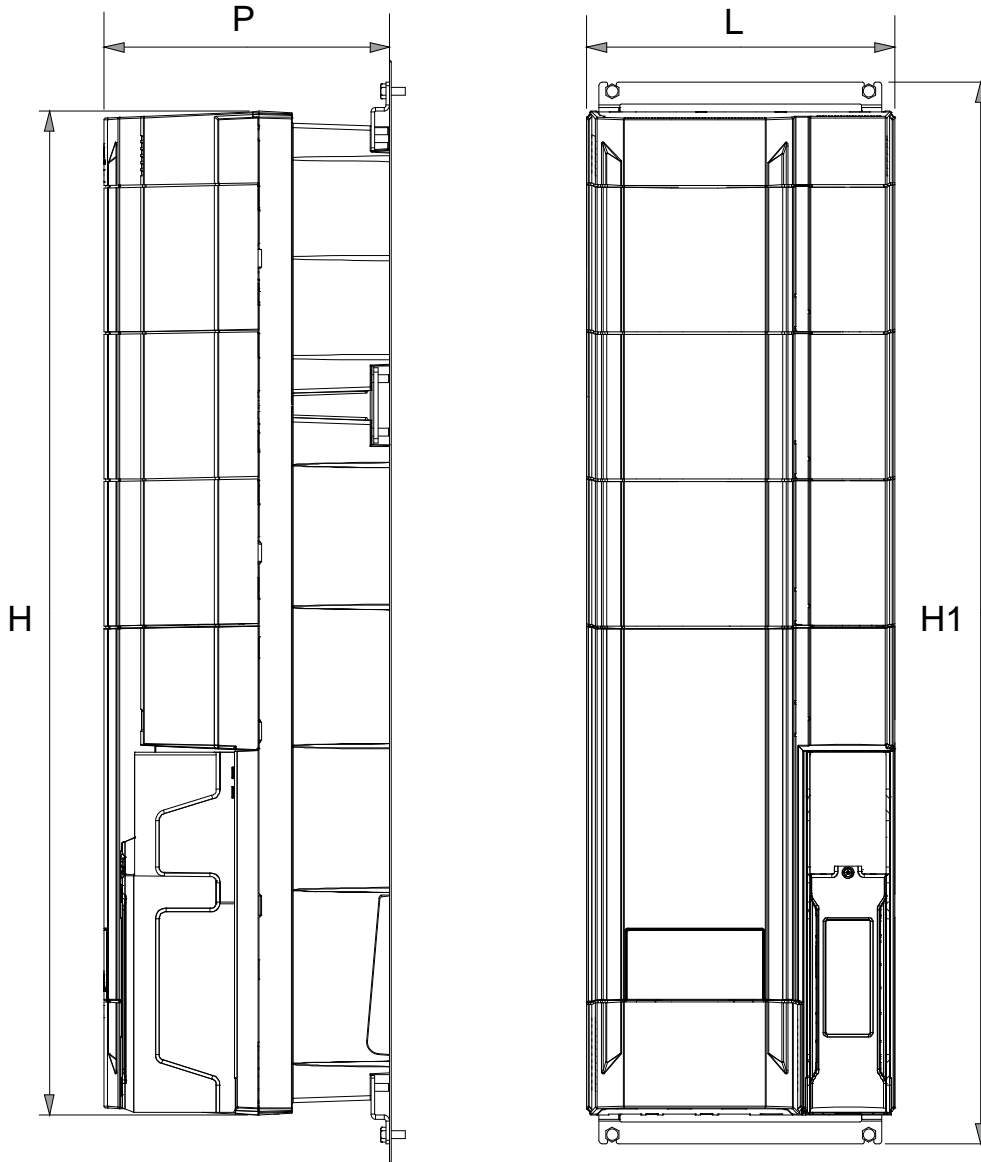

H (mm)	1049
H1 (mm)	1108
H2 (mm)	0

L (mm)	310
--------	-----

P (mm)	290
P1 (mm)	0

Weight (kg)	66.50
Total weight (kg)	66.65

PNEUTROL INTERNATIONAL LIMITED
sales@pneutrol.com

UK OFFICE:
5 CAULSIDE DRIVE, ANTRIM, BT41 2DU, NORTHERN IRELAND
TEL: + 44 (0) 28 9448 1800, www.pneutrol.com/industrialspares

EUROPEAN OFFICE:
UNIT 6, ST ANTHONY'S BUSINESS PARK DUBLIN, D22 VW95, IRELAND,
TEL: +353 (1) 437 3653, www.pneutrol.com/industrialspares